

THIS IS AN ARCHIVED FIGURE AND IS NO LONGER MAINTAINED AS PART OF THE SUDAS STANDARD SPECIFICATIONS. THIS FIGURE MAY CONFLICT WITH THE CURRENT SPECIFICATIONS, AND SECTION AND FIGURE REFERENCES MAY NO LONGER BE VALID.

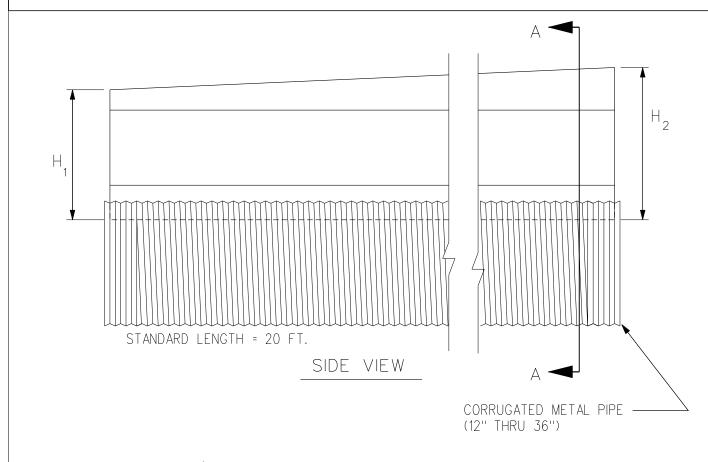

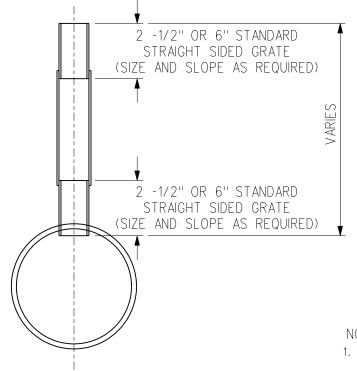

SECTION A-A

| LOADING CONDITION | MAX. EXTENDER HEIGHT - ''H'' |
|----------------------------------|---------------------------------|
| H10 * GRANULAR BACKFILL | 8" |
| H20/H25 * 750 PSI CONCRETE | 19'' |

* 125 PSITIRE PRESSURE

NOTES:

- 1. DIMENSIONS FOR H AND H AS REQUIRED
- 2. H $_{1}\&$ H $_{2}\!\text{MEASURED}$ FROM TOP OF GRATE TO BOTTOM OF GRATE

ARCHIVED: 10-21-08 SLOTTED DRAIN - VARIABLE HEIGHT GRATE

SHEET 1 OF 1