



THIS IS AN ARCHIVED FIGURE AND IS NO LONGER MAINTAINED AS PART OF THE SUDAS STANDARD SPECIFICATIONS. THIS FIGURE MAY CONFLICT WITH THE CURRENT SPECIFICATIONS, AND SECTION AND FIGURE REFERENCES MAY NO LONGER BE VALID.

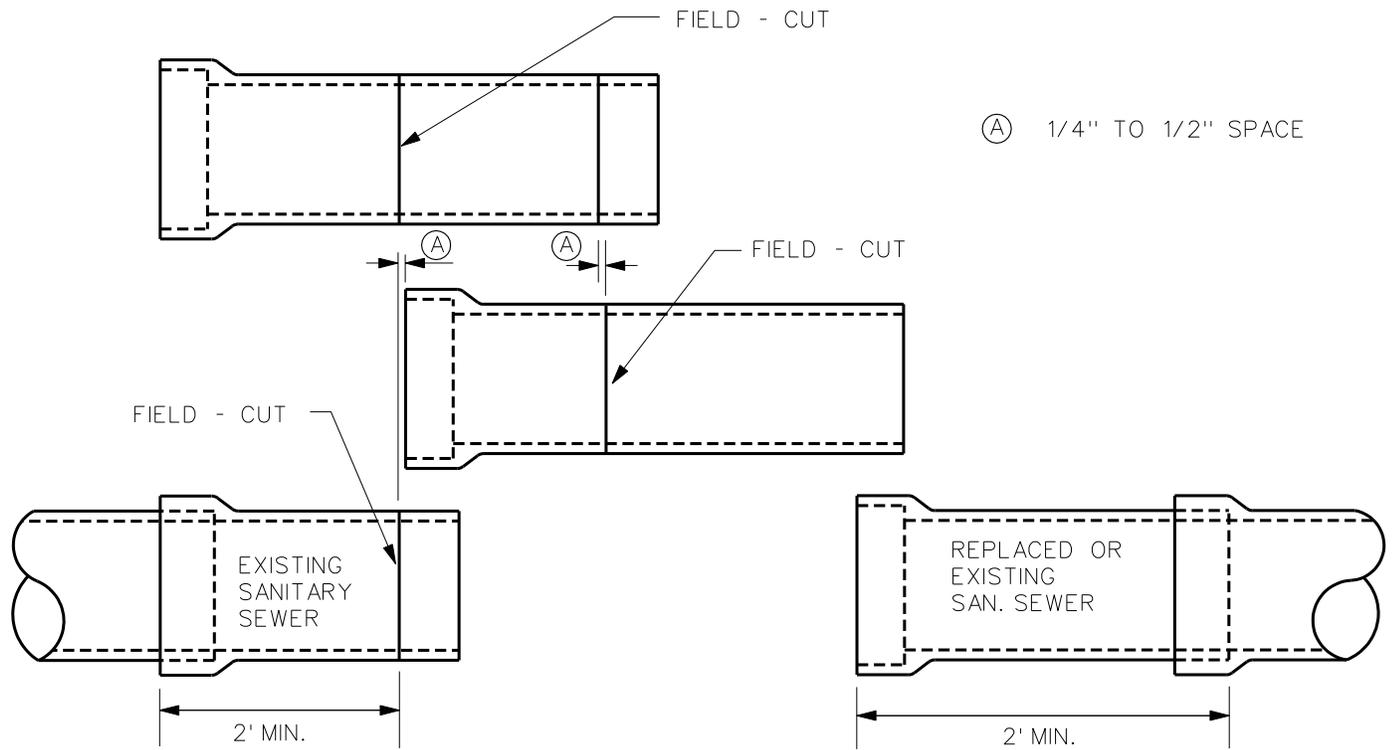

PIPE CUTTING DETAIL

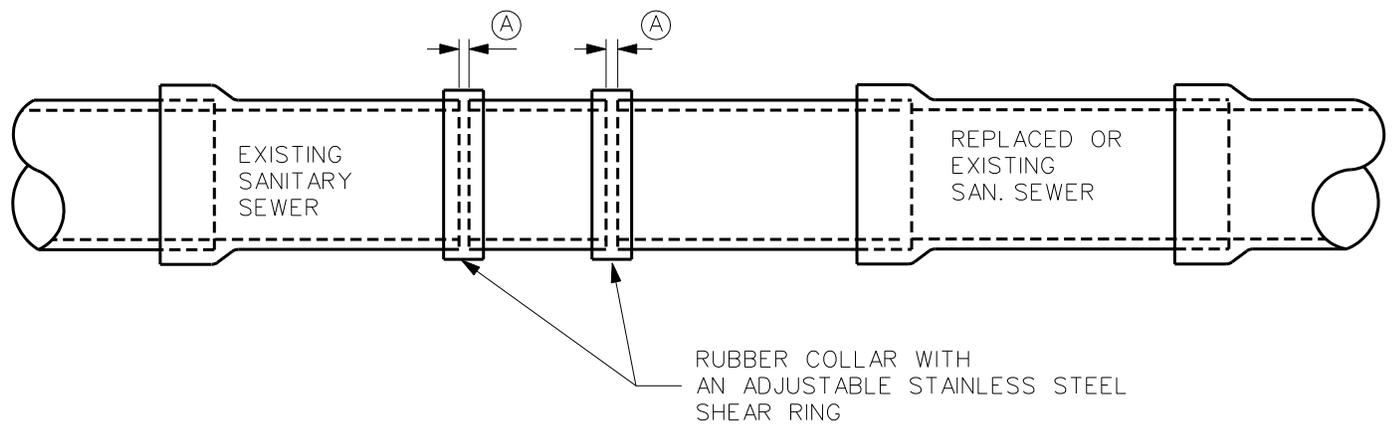

SEWER ASSEMBLY DETAIL

NOTE:

1. ALL PIPE SURFACES ON WHICH REPAIR COUPLINGS ARE TO BE INSTALLED SHALL BE CLEAN.
2. AFTER COMPLETING ASSEMBLY OF THE REPAIR COUPLINGS, ALL VOIDS UNDER THE EXPOSED SEWER LINE SHALL BE COMPLETELY FILLED WITH CONTROLLED DENSITY FILL.
3. MATERIALS FOR REPLACEMENT PIPE: SEE SPECIFICATIONS.