

## **ID 63 - New timber bridges- Inventive design by Block-Gluing**

**Frank MIEBACH**  
**Engineer (Dipl.-Ing. FH)**  
**Ingenieurbüro Miebach**  
**D-Lohmar, Germany**  
**info@ib-miebach.de**

CEO Schaffitzel + Miebach,  
Faszination Brücken GmbH  
D-Lohmar, Germany



1996-2000 timber engineers  
studies Rosenheim, Germany  
2000-2005 Project manager  
timber bridges Schaffitzel  
GmbH  
2005 Founding Ingenieurbüro  
Miebach in Cologne, Germany  
2009 CEO of Schaffitzel +  
Miebach GmbH,  
Since 2009 executive committee  
member of quality association  
timber bridges, Bonn Germany.

### **Summary**

The technology of gluing in wood construction has evolved considerably in recent years. This has been shown especially in timber bridges that Glulam is now the main building material. A further development is the so-called block gluing, which provides a good basis for supporting structures. Numerous bridges, especially in central Europe, appeal by unique design and monolithic and solid construction. These structures base on two main developments: block lamination of glulam and the composite of timber and concrete to one structural system.

**Keywords:** Block-Gluing, Glulam, Timber-Concrete-Composite.

## Introduction

### 1.1 History in Europe after industrialization

The history of bridge construction has always been connected to the technical state of the art. It started with applications of natural material as stones and wood. During the industrialization construction materials changed to steel and afterwards to concrete and high developed wood constructions got displaced by concrete or steel structures. Due to a mind change to ecological matters there is a rediscovery of wooden structures in the last decade. And the characteristics of wood –light but strong, easy to process – push this natural material into focus of architectural interests.

### 1.2 Retarding in evolution

Timber constructions have their own industrialization, but with some retardation. In 1906 a German Otto Hetzer patented the gluing of wooden beams. The modern glue-lamination was born. Glulam is a structural timber product consisting of number of layers glued together to a certain cross section. Additionally it is possible to block laminate a number of glulam beams together to achieve bigger cross sections.

This invention provides the possibility to produce wooden beams with huge dimension in a constant quality: length of 50m and more, width and heights of 3m and more. The gluing process even offers the possibility to produce curved elements or even twisted elements. This allows thinking and constructing in free forms.

Since 40 – 50 years glulam is used in halls – not just for the roof but also for the posts – and reaches a respectable market share by now. Wooden bridges are on the rise since almost 15 – 20 years.

There is a diversity of reasons for using of timber in bridges. For example, prefabricated large-sized parts are easy to handle and assemble because of their lower weight - a well-known advantage for economical constructions.

The durability of the construction often is discussed seriously because latest planning often does not consider historic knowledge as constructive wooden protection.

The development of gluing technology including block lamination is a type of the retarded timber industrialization.

## 2. Block laminated structures

Block lamination generates massive timber cross section to achieve loadbearing structures for large spans with a thin side view. Block lamination comprises three main steps: limitless gluing of lamellas through finger jointing, gluing layers of lamellas to a glulam beam and finally gluing numbers of beams to a massive block.



A certain form like a curve is created in step 2 “lamination of layers”. The curve is always vertical to the longitudinal axis because the layers only are flexible according to the thickness. Therefore smaller radiuses require thinner lamellas.

According to the required form a block laminated beam may have a curvature in top view or in side view. The difference in production is

a) Horizontal block lamination (curvature in side view)



or b) vertical block lamination (curvature in top view).



Even twisted forms are possible. Twisted beams are curved around two axes. The first curvature is generated in step 2 “lamination of layers” as usual. Afterward a horizontal band saw divides the curved beams into thin layers. These thin layers are sufficient flexible to be curved again in a second direction during block lamination.



A part from curved gluing, through block lamination stepped beams are feasible both in cross section and in longitudinal section. There for glulam beams with different height or length are block-laminated to one block beam.



### 3. Timber-concrete-composite bridges

The increasing role of ecology and sustainability of building materials more and more influences construction industry and leads to a rethink on site of the builders. The symbiosis between wood and concrete has the best conditions to meet all resulting claims. Constructions of massive wood beams statically connected to a concrete slab on the upper side ensuring optimum utilization of the material specifications of both materials. In this case the wooden cross-section is considered to take tensile forces and the concrete slab takes the pressure forces. Special connectors ensure the interaction of timber beams and concrete slab to get a more effective loading capacity and serviceability.

Advantages in comparison to conventional timber bridges:


- higher load capacity with lower height of construction
- good structural wood protection through cantilevered concrete slab on the top side
- optimal load spreading of point loads by the concrete slab
- better cross bracing
- use of proven details in connections to the concrete

Advantages in comparison to conventional concrete bridges:

- lower weight of the superstructure and thus more efficient structure
- fast and efficient installation with high degree of prefabrication without extensive formwork
- cost savings in foundation and the abutment
- improved energy balance and eco-balance, sustainability through CO<sup>2</sup> reduction

#### 3.1 HBV-shear connector

The HBV-shear connector by TiComTec (Haibach - GER) is an expanded metal part that is glued perpendicularly into the wooden structure. The dimension and number of connectors is determined to the static needs. The concrete slab usually has a thickness of at least 20 cm and has several functions: road decking, carrier plate for the dispersal of transverse loads and constructional wood protection.

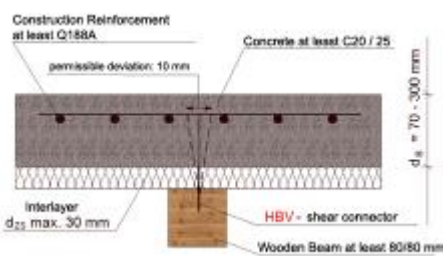


### 3.2 Head bolts

As known from steel-concrete bond structure in this alternative the connecting parts between wood and concrete are steel bars with welded head bolts. The bars fit exactly into milled kerfs and are fixed with screws. To achieve an efficient utilization, the axial distances of the dowel bars correspond to the traffic load and transverse force caused by the traffic load.



### 3.3 Kerfs and Glued in reinforcement bars

The shear connection in this type of timber concrete composite is implemented by a combination of kerfs and glued-in steel bars. The kerfs are milled in transverse direction and transfer shear forces (from longitudinal direction) into compressive forces to the vertical sides of the kerfs. To avoid a lifting of the concrete additional fasteners or connectors are considered (e.g. glued in reinforcement bars).

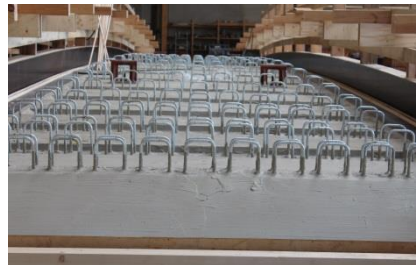

## 4. Conclusion

A changed awareness on ecological matters is the proper basis for timber bridges. Timber is the one and only material that saves and stores CO<sub>2</sub> permanently. And the technical possibilities are still growing. For example, researches on modern glues and gluing methods show in near future glues will be more efficient (temperature-resistant and the level of bonding pressure during the gluing process will be halved from 0,4 N/mm<sup>2</sup> to 0,2 N/mm<sup>2</sup>). Against this background the combination of block lamination and timber-concrete-composite is the beginning of the latest development: The comeback of timber bridges as adequate road bridges.

#### Reference list:

- 1) Dipl.-Ing. Antje Simon, Weimar 2008  
„Analyse zum Trag- und Verformungsverhalten von Straßenbrücken in Holz-Beton-Verbundbauweise“;
- 2) Matthias Gerold, Bruderverlag 2001  
„Holzbrücken am Weg“
- 3) Dipl.-Ing. Frank Miebach, in Brückenbau 03/2012  
„Holzbrückenbau 3.0 als Weiterentwicklung“
- 4) Dipl.-Ing. Richard J. Dietrich, Verlag Georg D.W. Callwey GmbH & Co. 1998  
„Faszination Brücken“

Frank Miebach: New timber bridges - inventive Design by block-gluing

Frank Miebach: New timber bridges - inventive Design by block-gluing