

# Silt Fences



<u>BENEFITS</u>			
	L	M	H
Flow Control	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Erosion Control	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Sediment Control	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Runoff Reduction	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Flow Diversion	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Description:** Silt fence is a temporary sediment barrier of geotextile fabric that is anchored into the ground and supported by posts on the downstream side of the fabric. Silt fences temporarily impound runoff and retain sediment onsite. They are most effective when designed to provide comprehensive water and sediment control throughout a construction site and if used in conjunction with erosion control practices.

**Typical Uses:** Used to control sheet flow runoff from disturbed land. May also be used to create a sediment trap for removal of suspended particles from low volume concentrated flows.

**Advantages:**

- Widely used BMP due to ease of installation and availability of materials.
- Relatively low cost.

**Limitations:**

- Ineffective against high flows.
- Must be removed after final stabilization.
- Could involve frequent maintenance related to removing accumulated silt behind the silt fence.

**Longevity:** Until sediment accumulates to one-half the height of the fence

**SUDAS Specifications:** Refer to [Section 9040.2.13](#) and [3.18](#)

## A. Description/Uses

Silt fence is a temporary barrier used to remove sediment from runoff. The fence works by intercepting sheet flow from slopes, causing the runoff to pond behind the fence, thereby promoting deposition of sediment on the uphill side of the fence.

Silt fence consists of a geotextile fabric that is trenched or sliced into the ground. The bottom of the fence is anchored into the ground by compacting the disturbed soil along both sides of the trench or slice. The top of the fence is attached to steel posts for support, creating a barrier to the flow of contaminated stormwater runoff.

Silt fence is one of the most commonly used sediment control practices. As such, it is often used improperly, or installed incorrectly. It should be placed at regular intervals on slopes to impound water. Silt fence can also be used in ditches and swales to create a small sediment containment system or ditch check. However, use as a ditch check should be limited to minor ditches and swales due to the potential for blow-out or undermining of the silt fence by high flows.

A common misconception among many designers is that the silt fence actually “filters” suspended particles from runoff. The effectiveness of silt fence is primarily derived from its ability to pond water behind the fence. This ponding action allows suspended particles to settle out on the uphill side of the fence. Particles are not removed by filtering the runoff through the fabric.

## B. Design Considerations

### 1. Overland Flow:

- a. **General Guidelines:** Silt fence for sediment and slope control should be installed along the contour of the slope (i.e. the entire length should be at the same elevation). At each end of the silt fence a 20 foot segment should be turned uphill (“J”-hook) to prevent ponded water from flowing around the ends of the silt fence. Individual sections of silt fence should be limited to 200 foot lengths. This limits the impact if a failure occurs, and prevents large volumes of water from accumulating and flowing to one end of the installation, which may cause damage to the fence.
- b. **Sediment Control:** When used for sediment control, silt fence should be located to maximize the storage volume created behind the fence. Larger storage volumes increase the sediment removal efficiency of the silt fence, and decrease the required replacement/clean-out intervals.

A common location to place silt fence for sediment control is at the toe of a slope. When used for this application, the silt fence should be located as far away from the toe of the slope as practical to ensure that a large storage volume is available for runoff and sediment.

- c. **Slope Control:** Silt fence can be installed on a slope to reduce the effective slope length and limit the velocity of runoff flowing down the slope. Silt fence also helps prevent concentrated flows from developing, which can cause rill and gully erosion. As a secondary benefit, silt fence installed on slopes can remove suspended sediment from runoff that results from any erosion that has occurred. For slopes that receive runoff from above, a silt fence should be placed at the top of the slope to control the velocity of the flow running onto the slope, and to spread the runoff out into sheet flow.

- d. **Perimeter Control:** Silt fence is commonly used as a perimeter control along streets or adjacent to water bodies to prevent polluted water from leaving the site. When a diversion or perimeter control silt fence is installed in the direction of a slope, a 20 foot length of fence should be turned in, across the slope, at regular intervals (100 feet) to create a “J”-hook. These “J”-hooks act as check dams, controlling the velocity of the diverted runoff as it travels along the fence.
2. **Concentrated Flow:** For concentrated flows in swales or ditches, the silt fence is installed at right angles to the flow of water with the end posts turned uphill to prevent water from flowing around the edges. The 2 year discharge in the ditch should be checked to ensure that it does not exceed 1 cfs. For ditch or swale applications greater than 1 cfs, alternative methods of sediment removal and velocity control within the ditch, such as rock or manufactured ditch checks and sediment traps, are required.
  3. **Diversion:** Silt fence can also be utilized as a synthetic diversion structure to redirect clean water around a site and intercept sediment-laden runoff and transport it to a sediment removal practice.

### C. Application

For sediment control applications, the maximum contributing area should not exceed 1/4 acre per 100 feet of fence. If the contributing area exceeds this value, additional silt fence should be installed to break up the runoff into multiple storage areas.

When used as a velocity control measure for sheet flow on long slopes of disturbed ground, silt fence should be placed at the spacing interval stated in the table below:


**Table 7E-14.01: Silt Fence Spacing on Slopes**

Slope	Placement Interval (feet)
≤ 10:1 (10%)	100
5:1 (20%)	60
4:1 (25%)	50
3:1 (33%)	40

When silt fence is used under concentrated flow, as a ditch check to intercept soil and debris from water flowing through ditches or swales, the following spacing guidelines should be used:

**Figure 7E-14.01: Typical Ditch Check Spacing**

Ditch Grade (%)	Spacing (feet)
1 to 2	150
2 to 4	75
4 to 6	40
> 6	25

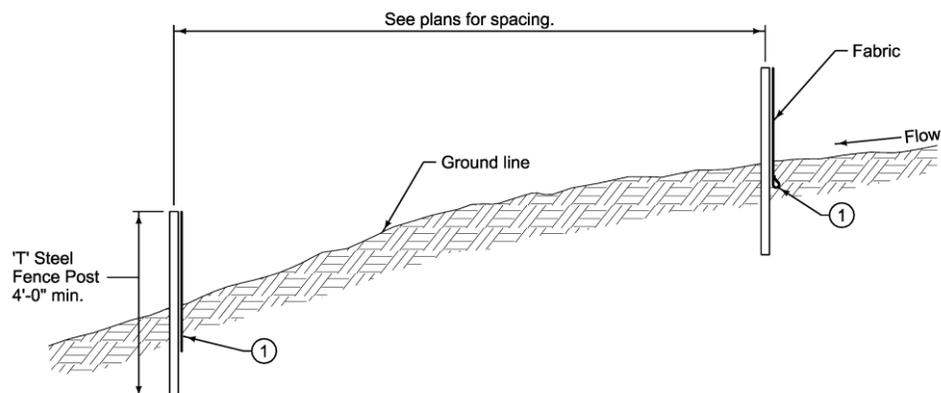

## **D. Maintenance**

When accumulated sediment reaches approximately one-half of the fence height, new silt fence should be installed, leaving the existing fence in place, and locating the new silt fence a sufficient distance away from it to provide area for sediment accumulation. When site conditions require that the silt fence be cleaned out, rather than replaced, extreme care must be taken to ensure that the silt fence is not damaged. Removed sediment should be spread out and stabilized. Any areas of damaged silt fence should be replaced immediately.

Upon project completion, fence fabric, posts, and accumulated sediment should be removed. Any areas disturbed by the removal of the silt fence or sediment should be stabilized.

## **E. Time of Year**

Silt fences are effective on a year-round basis. Installation may not be possible when there is frost in the ground due to the requirement to trench or slice the fence below the ground surface.