



TYPICAL SILT FENCE DITCH CHECK


- ① Insert 12 inches of fabric a minimum of 6 inches deep (fabric may be folded below the ground line).
- ② Install silt fence for perimeter control with a maximum run length of 100 feet. At the downstream end of each run, turn the silt fence up the slope for 20 feet as shown to construct a 'J-Hook' to contain runoff. At the contractor's option, the silt fence may terminate and restart at the J-hook or may be installed continuously through the J-hook.

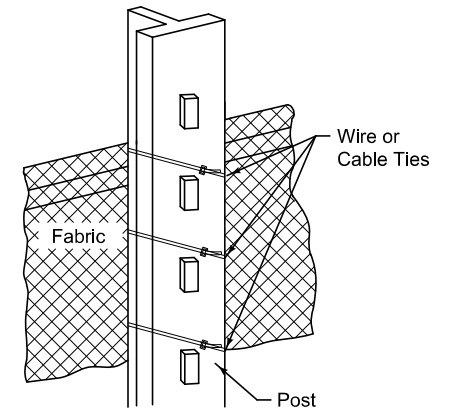


ATTACHMENT TO POST

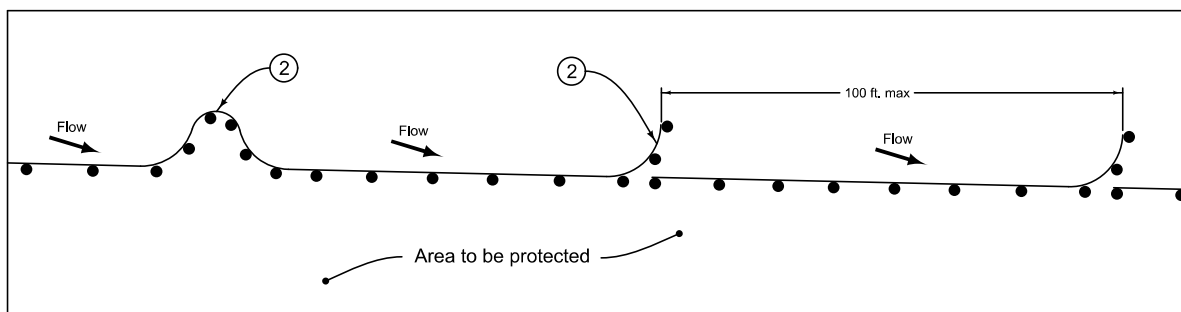


TYPICAL SILT FENCE INSTALLATION FOR PERIMETER CONTROL

	SUDAS 9040.119	<small>REVISION</small> 3 2023 Edition <small>SHEET 1 of 2</small>
	SUDAS Standard Specifications	
	SILT FENCE	

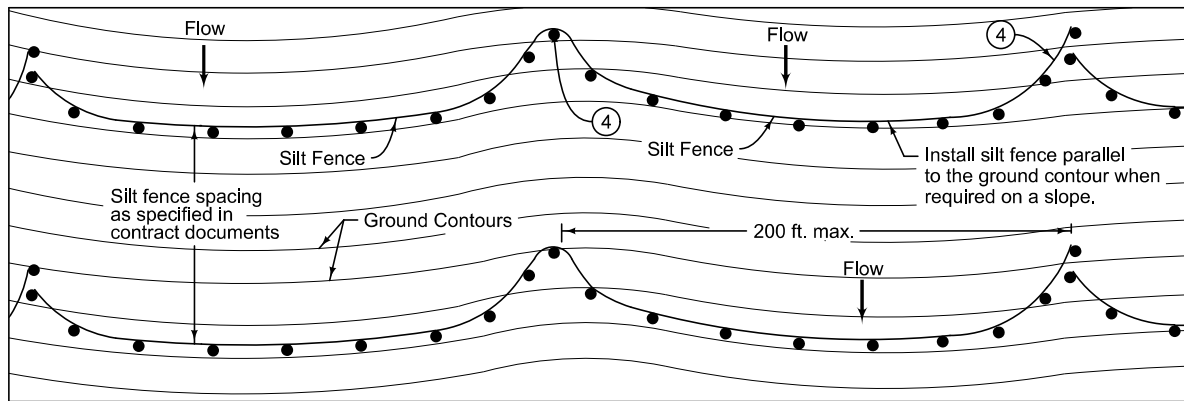


TYPICAL SILT FENCE INSTALLATION ON LONGITUDINAL SLOPES
(Plan View)


- ① Insert 12 inches of fabric a minimum of 6 inches deep (fabric may be folded below the ground line).
- ③ Reduce post spacing to 5'-0" at water concentration areas, or as required to adequately support fence.
- ④ Place silt fence continuously along a constant elevation for a maximum run of 200 feet. At the end of each run, construct a 'J-Hook' to contain runoff by turning the silt fence up the slope for a length of 20 feet as shown. At the contractor's option, the silt fence may terminate and restart at the J-hook or may be installed continuously through the J-hook.

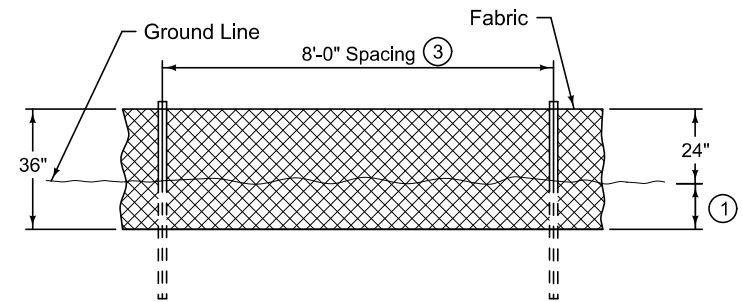

DETAILS OF SILT FENCE ON LONGITUDINAL SLOPES

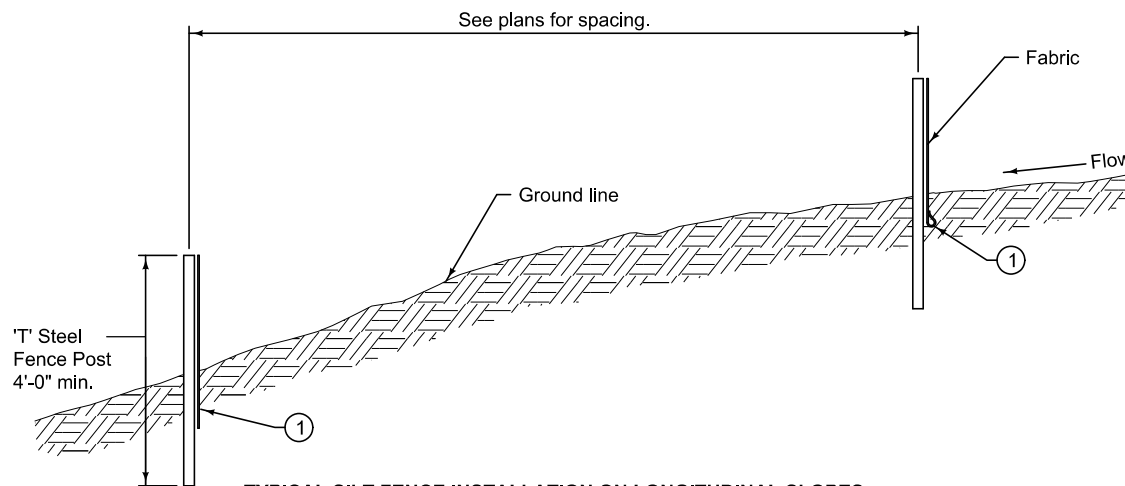

TYPICAL SILT FENCE INSTALLATION ON LONGITUDINAL SLOPES
(Profile View)

	REVISION 3 2023 Edition
	SUDAS 9040.119
	SHEET 2 of 2
SUDAS Standard Specifications	
SILT FENCE	